

# FLEETGENIUS® APARTMENT COMPACTORS

## DESIGNED FOR MULTI-STORY BUILDINGS WITH TRASH CHUTES



The FleetGenius® line up of Apartment Compactors provide excellent compaction in a very small footprint. They are ideal for high-rise residential buildings where trash is chute fed. The compactor packs into a mobile receiver container which can be rolled to the street for pickup. FleetGenius's 3 point latching design ensures positive and durable connection to the receiver container. For added safety and ease of use, opt for THE GLIDE WHEEL option which incorporates a brake system on the receiver container.

### APPLICATIONS

- Apartments
- Condominiums
- High Rise Buildings
- Nursing Homes
- Healthcare Facilities

- Model S-100 for 24" Trash Chutes
- Model S-125 for Larger 36" Trash Chute
- Chute & Ground Feed Access
- Small Footprint for Limited Spaces
- Up to 5:1 Compaction Ratio
- Secure Side Lever Latching
- Photo Eye & Auto-Start Operation
- UL Listed Controls & Power Unit



FLEETGENIUS®

[WWW.FLEETGENIUS.COM](http://WWW.FLEETGENIUS.COM)




# FleetGenius Secure Side Latch Lever

a safe, reliable container locking system.



- Ensures container is fully engaged and locked down
- Container is secured on both sides
- Prevents container jumping off connection when under pressure
- Reduces chance of injury and property damage from container coming loose
- Single side latch lever can be installed on either side of the compactor
- Latch Lever can be moved to opposite side with standard tools
- Simple retrofit latch pockets can be ordered to convert old containers

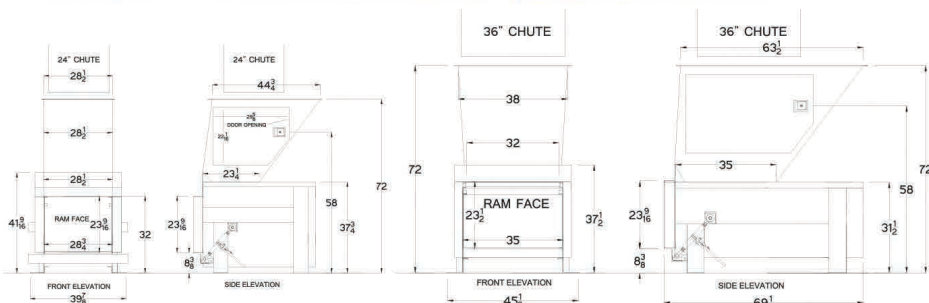

S-100	SPECIFICATIONS	S-125
0.39 cu yd	Charge Box Capacity	0.59 cu Yd
0.28 cu yd	WASTEC Rating	0.48
22.5"L x 28"W	Clear Top Opening	35"L x 32"W
74 cu. Yd	Capacity per Hour	82 cu. Yd
14 sec.	Cycle Time	20 sec.
13,900 lbs.	Normal Force	13,900 lbs.
16,400 lbs.	Pack out Force	16,400 lbs.
23.2 psi	Normal Ram Race Force	23.2 psi
27.3 psi	Pact out Ram Force	27.3 psi
4"	Ram Penetration	4"
5 HP	Motor (208/230/460v 3 PH)	5 HP
120 VAC	Control Voltage	120 VAC
6 GPM	Hydraulic Pump Capacity	6 GPM
1650 psi	Normal System Pressure	1650 psi
1950 psi	Maximum System Pressure	1950 psi
2. ea.	Hydraulic Cylinders	2 ea.
	2.5" Bore, 1.25 " Rod)	
1850#	Weight	1975#

## The Glide Wheel System



Compactors receivers with The Glide Wheel System are safer and easier to maneuver



The built in braking system prevents runaway containers. The wheels also lock down for hauler pickup.



[WWW.FLEETGENIUS.COM](http://WWW.FLEETGENIUS.COM)

FLEETGENIUS®

1808 Norwood St SW  
Lenoir, NC 28645  
828-726-3001 (phone)  
828-726-3010 (fax)

**800-221-4153**